


Art.: 3070 / 3080
Válvula de Esfera 3 Vías Tipo "L" / "T"
Type "L" / "T" 3 Ways Ball Valve

Características

1. Extremos rosca gas H-H, ISO 228/1.
2. Construcción en latón niquelado.
3. PN-25 bar.
4. Temperatura de trabajo de -10°C a +120°C.
5. Válvula conforme a directiva 97/23/EC.

Features


1. F-F G threaded ends according ISO 228/1.
2. Nickel-plated brass construction.
3. PN-25 bar.
4. Working temperature from -10°C to +120°C.
5. Valve conforming to directive 97/23/EC.

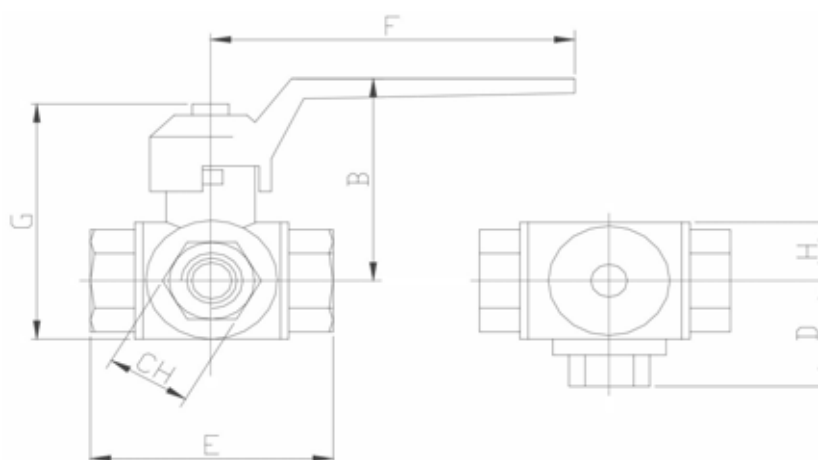

Ref.	Rosca / Thread	Dimensiones / Dimensions (mm.)								Peso / Weight (g.)
		DN	B	D	E	F	G	H	CH	
3070/80 02	1/4"	10	65	38,5	77	125	75	22	22	710 / 708
3070/80 03	3/8"	12	65	38,5	77	125	75	22	22	670 / 665
3070/80 04	1/2"	14	65	38,5	77	125	75	22	27	640 / 635
3070/80 05	3/4"	18	83	46	92	145	91	25	34	1100 / 1094
3070/80 06	1"	23	96	52	104	170	105	30	41	1650 / 1642
3070/80 07	1 1/4"	29	102	59	118	170	115	34	50	2250 / 2242
3070/80 08	1 1/2"	36	109	69	138	170	128	40	57	3640 / 3630
3070/80 09	2"	45	139	81	162	260	165	48	70	5700 / 5690

N°	Denominación / Name	Material / Material
1	Cuerpo / Body	Latón / Brass CW617N – UNE-EN 12165
2	Extremos / Sleeve (3)	Latón / Brass CW617N – UNE-EN 12165
3	Esfera / Ball	Latón / Brass CW617N – UNE-EN 12165 Cromado duro / Hard chrome plated
4	Eje / Stem	Latón / Brass CW614N – UNE-EN 12164
5	Asientos / Ball Seats (4)	PTFE puro / pure PTFE
6	Juntas tóricas / O-Rings (2)	NBR
7	Accionamiento / Handle	Aluminio / Aluminium EN-AB46100
8	Tornillo / Screw	Acero zincado / Zinc-plated steel

Información técnica / Technical Data

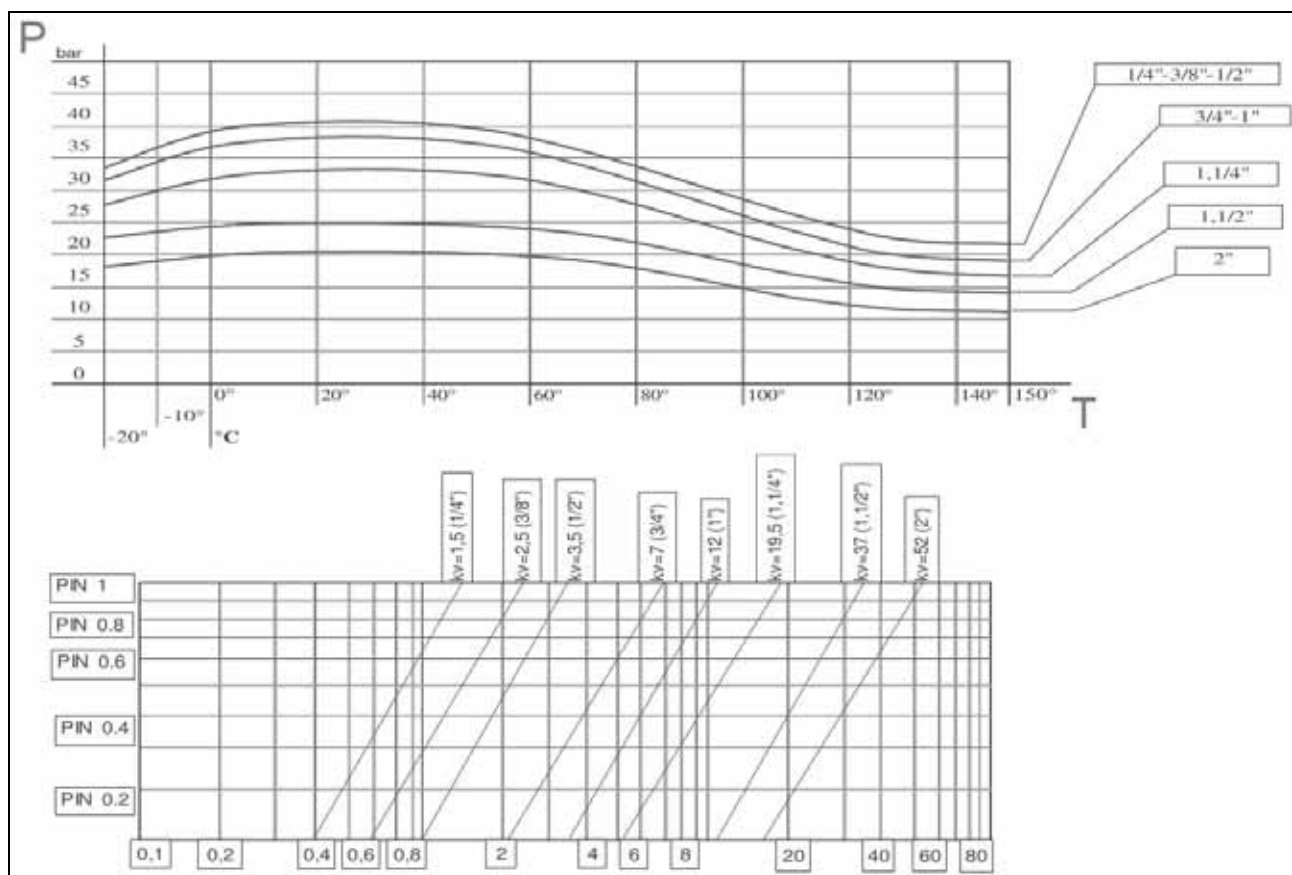

Nota: Esta válvula debe ser empleada de acuerdo a lo indicado en la gráfica de instrucción técnica. Para medidas a partir de 1 1/4", la válvula no debe ser usada con fluidos peligrosos como explosivos, inflamables (donde se alcancen temperaturas por encima del punto de inflamabilidad), tóxicos, oxidantes.

Note: This valve must be employed as indicated in this data sheet instructions. For 1 1/4" and superior sizes, it can't be employed for dangerous fluids as explosive, flammable (where maximum allowable temperature is above flashpoint), toxic, oxidizing.



Instrucciones (tipo 'T' o tipo 'L')

Sacando la palanca se puede observar una marca en la parte superior del eje en forma de T o de L, según el tipo, que indica la dirección en las que hay paso a través de la esfera. Para cada tipo existen las posibilidades que se indican en el siguiente esquema gráfico.

Instructions (type 'T' or type 'L')


Without the lever is visible on the top of the stem a T or L notch, which indicates the direction bores on the ball. For each type are the options listed in the following graphic scheme.

Tipo 'T' / 'T' Type




Fluido en las 3 direcciones (A-B-C)

Flow is in the three directions (A-B-C)




Fluido de B a C (o de C a B)

Flow is only from B to C (or from C to B)



Fluido de A a C (o de C a A)


Flow is only from A to C (or from C to A)



Fluido de A a B (o de B a A)

Flow is only from A to B (or from B to A)

Tipo 'L' / 'L' Type



Fluido de B a C (o de C a B)

Flow is from B to C (or from C to B)



Fluido interrumpido
Flow interrupted



Fluido interrumpido
Flow interrupted



Fluido de A a B (o de B a A)

Flow is from A to B (or from B to A)