



Válvula retención RE-GE RE-GE Check valve

Características

1. Válvula retención mono cuerpo desmontable PN-25/12
2. Construcción en latón forjado según DIN 17660
3. Extremos rosca gas hembra s/ISO 228/1
4. Temperatura máxima funcionamiento:
Aire: -20° C a 110 ° C
Gas: -20° C a 60 ° C
Agua: 0° C a 90° C
5. Presión Mínima de apertura 0.04 bar
6. Apta para todo tipo de instalaciones Industriales, neumáticas e hidráulicas.
7. Montaje multiposicional (horizontal, vertical y oblicuo)
8. Junta de clapeta vulcanizada de NBR

Features

1. Removable monoblock check valve PN-25/12
2. Hot-forging brass according to DIN 17660
3. Ends: female gas nut acc/ to ISO 228/1
4. Max. Temperature of working
Air: -20° C to 110° C
Gas: -20° C to 60° C
Water: 0° C to 90° C
5. Minimum pressure of open 0.04 bar
6. Suitable for all kind of industrial pneumatic and hydraulic installations
7. Multipositional setting up (horizontal vertical and oblique).
8. Vulcanized NBR gasket plate

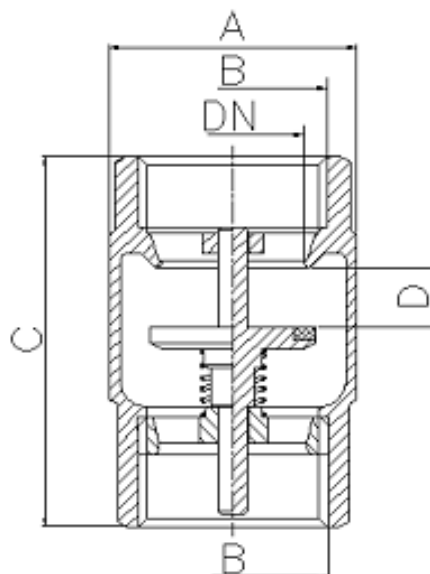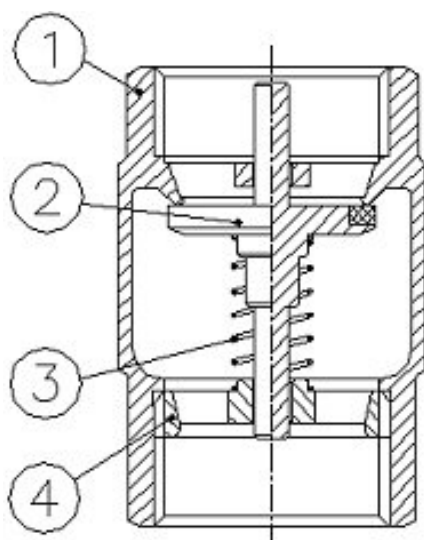

N°	Denominación / Name	Material	Acabado Superficial / Surface Treatment
1	Cuerpo / Body	Latón / Brass	Peened + Machining / Granallado + Mecanizado
2	Plate / Clapeta	Latón / Brass	Peened + Machining / Granallado + Mecanizado
3	Spring / Muelle	Acero Inox. 302 / AISI 302	-
4	Anillo / Ring	Latón / Brass	Peened + Machining / Granallado + Mecanizado

Ref.			Dimensiones/Dimensions (mm)				Peso/Weight (g)
			PN	ØA	C	D	
3121 04	1/2" G)	15	PN 25	30	50	7.5	110
3121 05	3/4" G	20	PN 25	Ø36.5	57	8.5	175
3121 06	1" G	25	PN 25	Ø43	65	10.5	260
3121 07	1 1/4" G	32	PN 18	Ø53	70	11	375
3121 08	1 1/2" G	40	PN 18	Ø64.5	75.5	12	525
3121 09	2" G	50	PN 18	Ø79.5	81.5	14	800
3121 10	2 1/2" G	65	PN 12	Ø104	104	22	1655
3121 11	3" G	79	PN 12	Ø124	113	23	2365
3121 12	4" G	100	PN 12	Ø155	132	27	3935